



F SERIES

W3-315SC

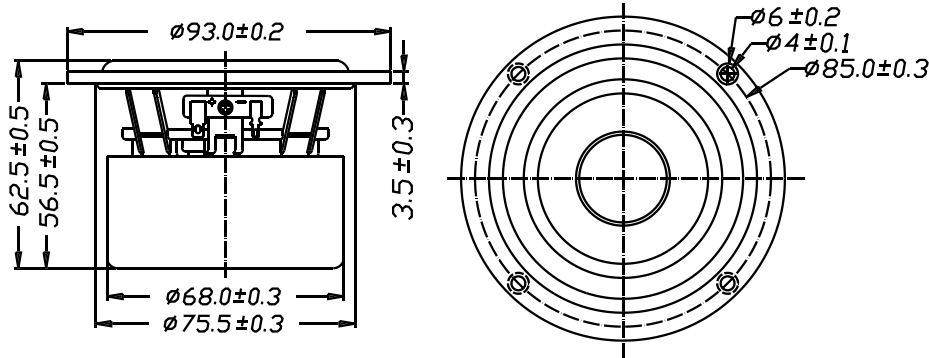

- HIGH POWER LOADING DESIGN
- FULL RANGE FREQUENCY RESPONSE
- DIE CAST BASKET
- ALUM/MG CONE WITH PULUX SURROUND
- MAGNETICALLY SHIELDED
- CCAW WITH KAPTION BOBBIN

3" Alum/Mg CONE/ FULL RANGE

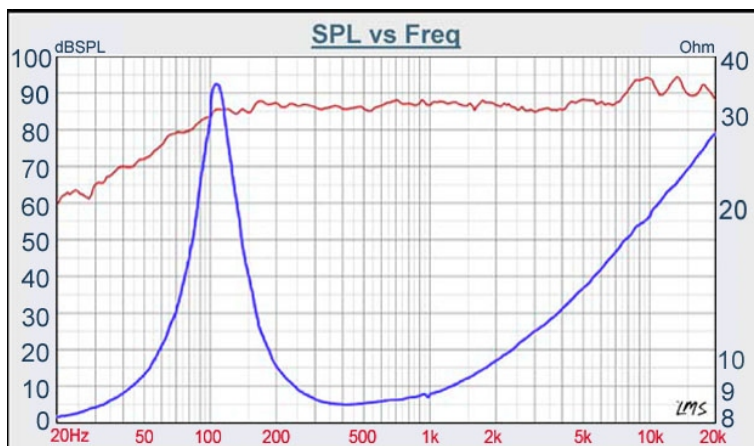

DIAPHRAGM MTL	Alum/Mg
SURROUND MTL	Santoprene
NOMINAL IMPEDANCE	8
DCR IMPEDANCE	6.6
SENSITIVITY 1W/1m	85 dB
FREQUENCY RESPONSE	100 - 20kHz
FREE AIR RESONANCE	100 Hz
VOICE COIL DIAMETER	20 mm
AIR GAP HEIGHT	6 mm
RATED POWER INPUT	15 W
MAXIMUM POWER INPUT	30 W
FORCE FACTOR, BL	3.30 TM
MAGNET WEIGHT (6 oz)	103 g
MOVING MASS	1.97 g
FERROFLUID ENHANCED	No
SUSPENSION COMPLIANCE	1152 MN ⁻¹
EFFECTIVE PISTON AREA	0.0032 M ²
Levc	0.2896 mH
Zo	34.0001 ohm
X-max	0.5 mm
Vas	1.68 Litr
Qts	0.64
Qms	3.30
Qes	0.80



VOICE: 886.2.26570282 FAX: 886.2.26580166
E-MAIL: info@tb-speaker.com